




GRT-145-4

4Ω SEALED RIBBON TWEETER

Product Index Number: 060-0009

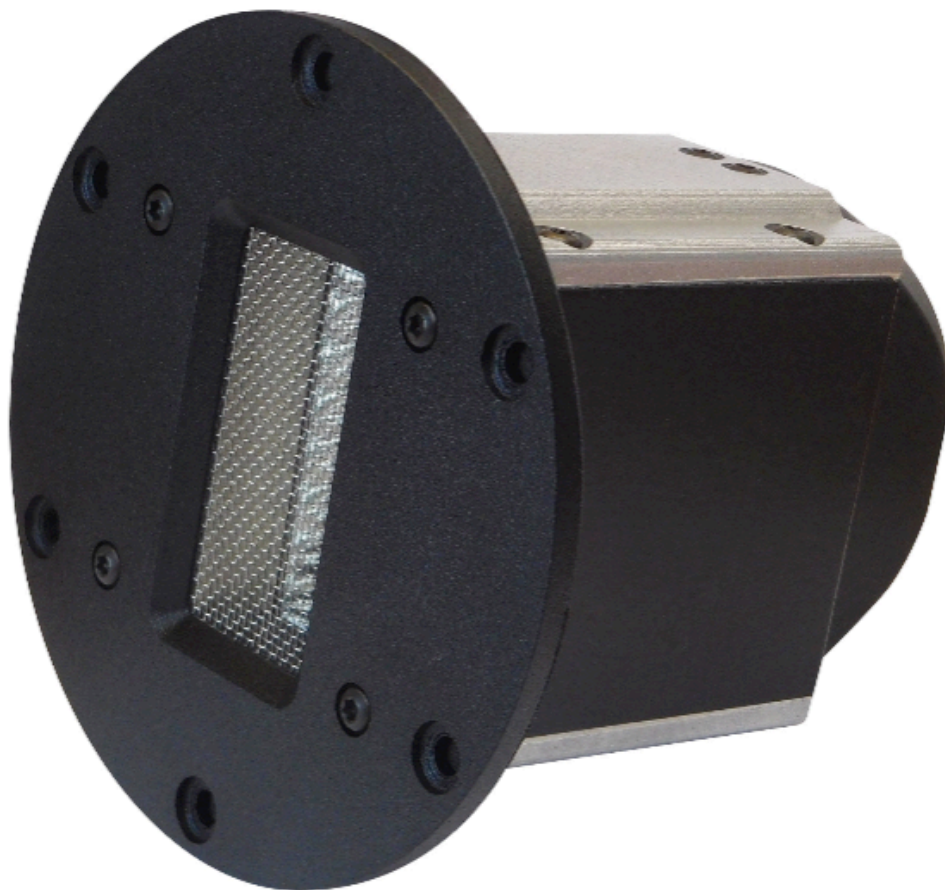

PRODUCT FEATURES

What makes the GRT-145-4 different?

The air gaps between the ribbons and the poles are sealed.

This sealing technology dramatically reduces harmonic distortion at low frequencies of the operating range.

The sensitivity is increased by 2 to 3 dB.

By combining the SRT technology with a powerful magnetic system, this ribbon tweeter offers a world first sensitivity level for a 7 cm² ribbon @ 95 dB/W/m in the 4 to 18 kHz range.

Key product features:

- Hand assembled with high attention to quality control and overall finish
- U-Shaped Mylar Suspension
- Impressive sensitivity and frequency response Low distortion due to the SRT technology
- Easy to implement for loudspeaker and crossover design
- Ultra clean cumulative spectral decay graph High-end performance at a reasonable price

Click [HERE](#) for data sheet

TECHNICAL INFORMATION & REVIEWS

Click [HERE](#) for manufacturer's data sheet

Click [HERE](#) to read the review by Mr. Troels Gravesen (Denmark)

Click [HERE](#) to read the review by Klang & Ton (In German)

Click [HERE](#) For a video review #1 by Impulse Audio (Canada)

Click [HERE](#) For a video review #2 by Impulse Audio (Canada)

For B2C sales (private consumers):

To find a distributor of our products in your region, please follow the link below:

➡ [WHERE TO BUY](#)

For questions about technical subjects, distribution or B2B sales, kindly contact us at:

➡ CONTACT@JANTZEN-AUDIO.COM

For B2B (business to business) orders kindly contact us at:

➡ ORDERS@JANTZEN-AUDIO.COM