

JANTZEN AUDIO

AUDIO CABLES



Stranded Cable

Product index: 006-0045



PFTE (Teflon) insulated cable, silver infused copper strands

Recommended application:

- Internal connections (crossover to terminals & drivers)
- External connections (amplifier to speakers, etc.)

Insulation color: Black

Cross Section: 1 x 1,30 mm² / 16 AWG

Weight: 15 grams per meter

Copper purity: 99,99%

Silver content: 0,29 gram per meter

Max. voltage: 600 V

Stranded Cable

Product index: 006-0050



PTFE (Teflon) insulated cable, silver infused copper strands

Recommended application:

- Internal connections (crossover to terminals & drivers)
- External connections (amplifier to speakers, etc.)

Insulation color: Red

Cross Section: 1 x 1,30 mm² / 16 AWG

Weight: 15 grams per meter

Copper purity: 99,99%

Silver content: 0,29 gram per meter

Max. voltage: 600 V

Stranded Cable

Product index: 006-0051



PTFE (Teflon) insulated cable, silver infused copper strands

Recommended application:

- Internal connections (crossover to terminals & drivers)
- External connections (amplifier to speakers, etc.)

Insulation color: Black

Cross Section: 1 x 2,50 mm² / 13 AWG

Weight: 33 grams per meter

Copper purity: 99,99%

Silver content: 0,59 gram per meter

Max. voltage: 600 V

Stranded Cable

Product index: 006-0052



PTFE (Teflon) insulated cable, silver infused copper strands

Recommended application:

- Internal connections (crossover to terminals & drivers)
- External connections (amplifier to speakers, etc.)

Insulation color: Red

Cross Section: 1 x 2,50 mm² / 13 AWG

Weight: 33 grams per meter


Copper purity: 99,99%

Silver content: 0,59 gram per meter

Max. voltage: 600 V

Solid Core Cable

Product index: 006-0070

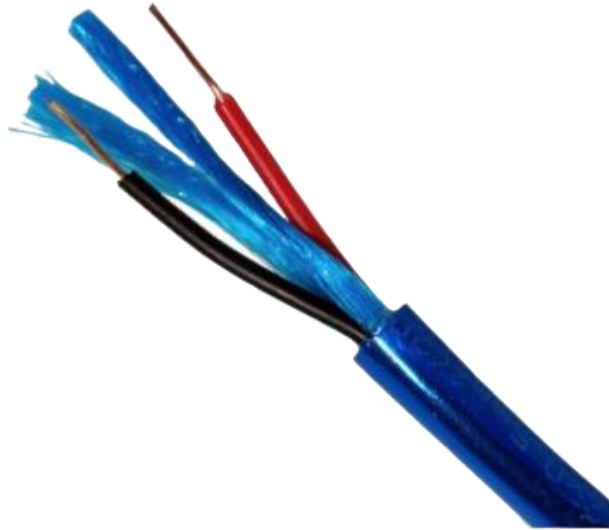

Recommended application:

- Internal connections (crossover to terminals & drivers)

Insulation color: Blue

Cross Section: 2 x 0,50 mm² / 20 AWG


Weight: 42 grams per meter

Copper purity: 99,9999%

Max. voltage: 80 V

Solid Core Cable

Product index: 006-0080

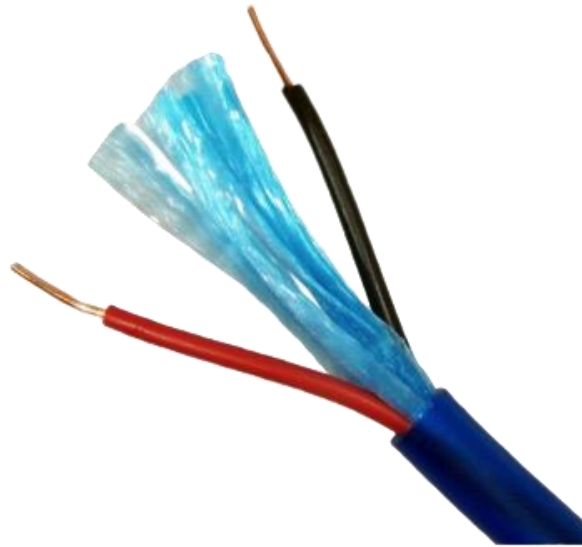

Recommended application:

- Internal connections (crossover to terminals & drivers)

Insulation color: Blue

Cross Section: 2 x 1,00 mm² / 17 AWG


Weight: 55 grams per meter

Copper purity: 99,9999%

Max. voltage: 80 V

Solid Core Cable

Product index: 006-0085

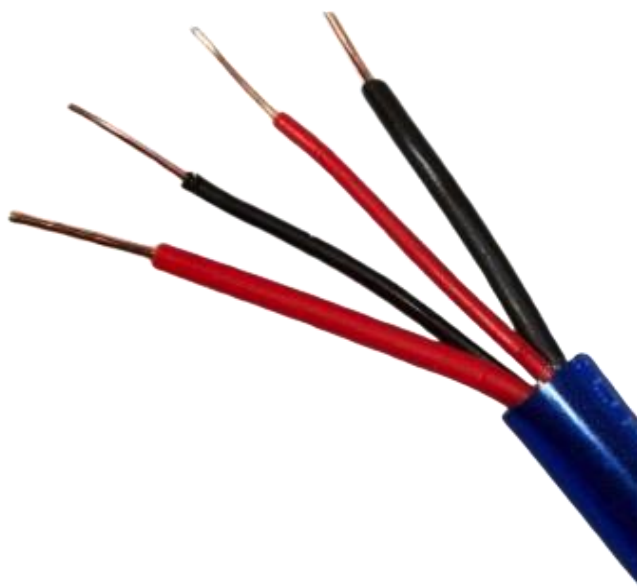

Recommended application:

- Internal connections (crossover to terminals & drivers)
- External connections (amplifier to speakers, etc.)

Insulation color: Blue

Cross Section: $2 \times 1,00 + 2 \times 0,5 \text{ mm}^2$ - 17/20 AWG

Weight: 63 grams per meter

Copper purity: 99,9999%

Max. voltage: 80 V

Stranded Cable

Product index: 006-0090



Recommended application:

- Internal connections (crossover to terminals & drivers)
- External connections (amplifier to speakers, etc.)

Insulation color: Transparent

Cross Section: 2 x 1,5 mm² / 15 AWG

Weight: 42 grams per meter

Copper purity: 99,99%

Max. voltage: 80 V

Flat Braided Cable

Product index: 006-0095



Recommended application:

- External connections (amplifier to speakers)

Insulation color: Transparent

Cross Section: 2 x 1,5 mm² / 15 AWG

Weight: 42 grams per meter

Copper purity: 99,99%

Max. voltage: 80 V

Stranded Cable

Product index: 006-0100



Recommended application:

- Internal connections (crossover to terminals & drivers)
- External connections (amplifier to speakers, etc.)

Insulation color: Black/Red

Cross Section: 2 x 1,5 mm² / 15 AWG

Weight: 42 grams per meter

Copper purity: 99,99%

Max. voltage: 80 V

Stranded Cable

Product index: 006-0105



Recommended application:

- Internal connections (crossover to terminals & drivers)
- External connections (amplifier to speakers, etc.)

Insulation color: Black/Red

Cross Section: 2 x 1,5 mm² / 15 AWG

Weight: 63 grams per meter

Copper purity: 99,99%

Max. voltage: 80 V

Stranded Cable

Product index : 006-0110



Recommended application:

- Internal connections (crossover to terminals & drivers)
- External connections (amplifier to speakers, etc.)

Insulation color: Transparent

Cross Section: 2 x 2,5 mm² / 13 AWG

Weight: 62 grams per meter

Copper purity: 99,99%

Max. voltage: 80 V

Flat Braided Cable

Product index: 006-0115



Recommended application:

- External connections (amplifier to speakers)
- Insulation color: Transparent

Cross Section: 2 x 2,5 mm² / 13 AWG

Weight: 73 grams per meter

Copper purity: 99,99%

Max. voltage: 80 V

Stranded Cable

Product index: 006-0120



Recommended application:

- Internal connections (crossover to terminals & drivers)
- External connections (amplifier to speakers, etc.)

Insulation color: Black

Cross Section: 2 x 2,5 mm² / 13 AWG

Weight: 68 grams per meter

Copper purity: 99,99%

Max. voltage: 80 V

Stranded Cable

Product index: 006-0125



Recommended application:

- Internal connections (crossover to terminals & drivers)
- External connections (amplifier to speakers, etc.)

Insulation color: White

Cross Section: 2 x 2,5 mm² / 13 AWG

Weight: 68 grams per meter

Copper purity: 99,99%

Max. voltage: 80 V

For B2C sales (private consumers):

To find a distributor of our products in your region, please follow the link below:

👉 [WHERE TO BUY](#)

For questions about technical subjects, distribution or B2B sales, kindly contact us at:

👉 CONTACT@JANTZEN-AUDIO.COM

For B2B (business to business) orders kindly contact us at:

👉 ORDERS@JANTZEN-AUDIO.COM